

A s'port s' to ort n'rtion  
o' r' g' n' on ov rpos' n' pr s' on


ron Duv v' n' B' r' on E' n'  
A Jon' n' How' H' r' Bu' ton

c' i' s'

Jon' r'

I - 1

UNIVERSITY OF




---

Co n'v' n' n'  
s' r' p' o' rs

---

A similarity-based method for the generalization  
of face recognition over pose and

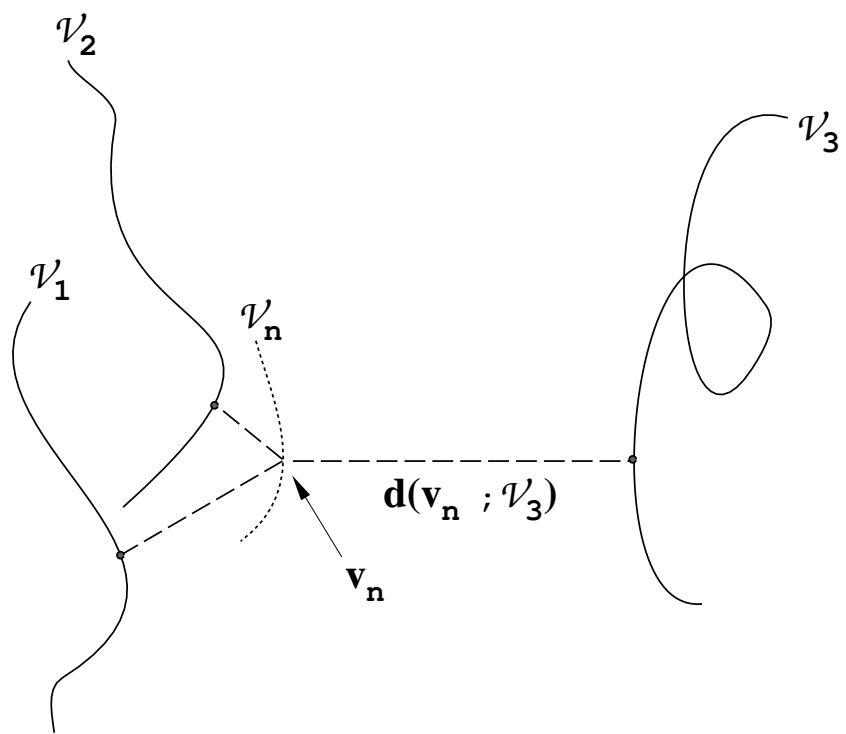

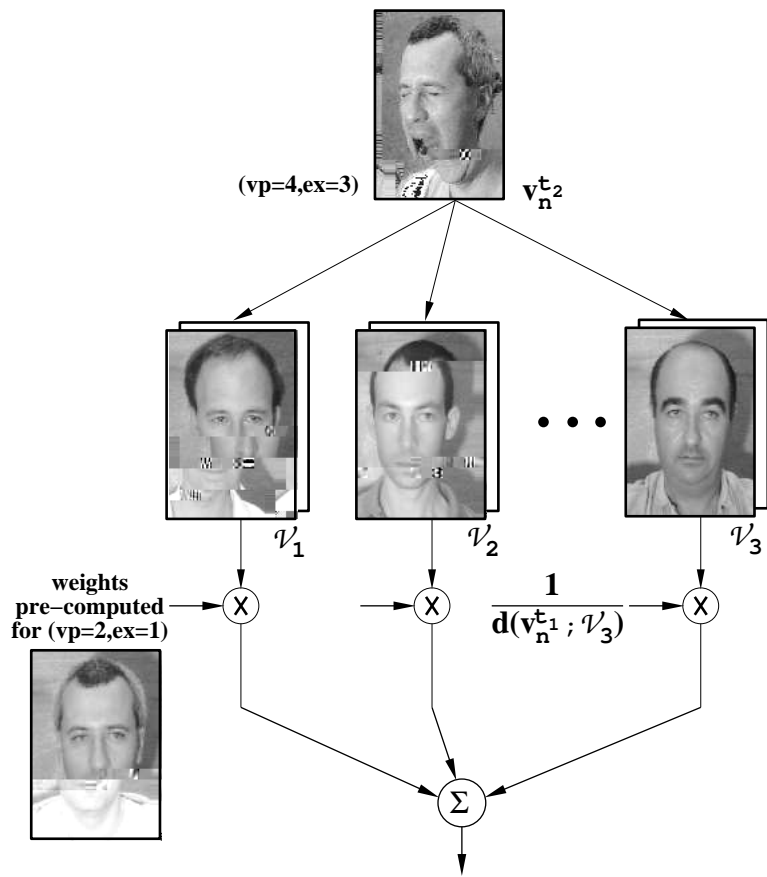


Figure 2: A mechanism for estimating the views

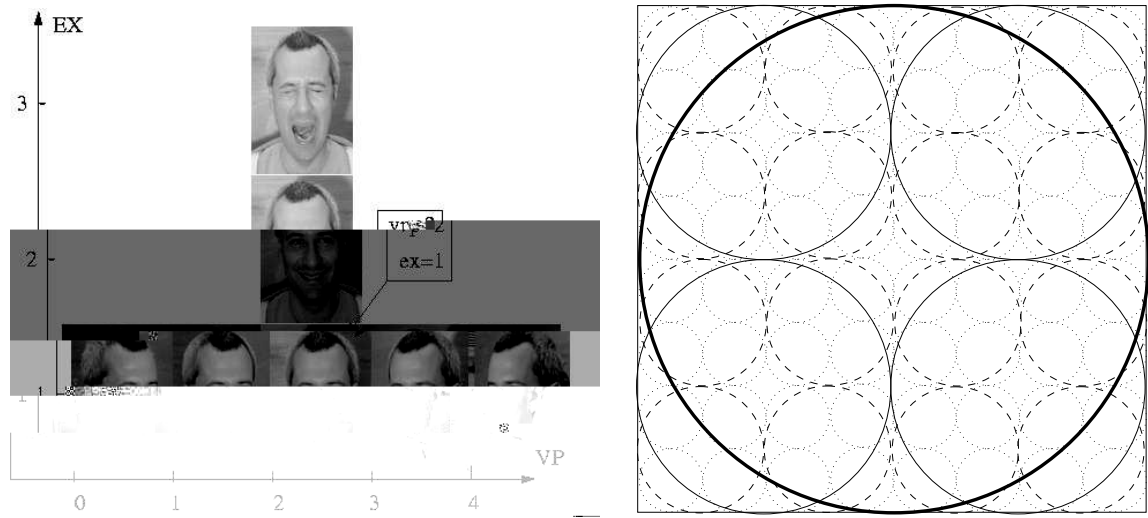


Figure 3: *Left:* the dimensions of variation in the face space. *Right:* the dimensions of variation in the face space.

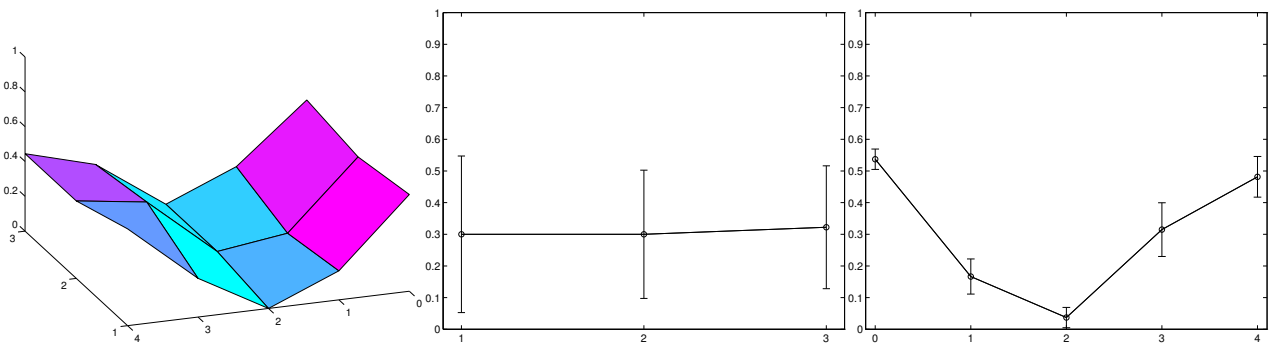


Figure 4: *Left*: a surface plot of the error rate vs. VP and EX (the numbers are listed in Table 1). *Middle*: error rate vs. VP, averaged over the three different values of EX. *Right*: error rate vs. EX, averaged over the five different values of VP. The mean error rate over the five viewing positions (spanning a range of  $\pm 34^\circ$  in orientation), and the three expressions was 0.3074. The error bars correspond to  $\pm 1$  standard error of the mean computed over the 18 test faces.

perience with similar objects (i.e., other faces seen in a variety of conditions) serves to guide the system in its treatment of the stimulus. Since the introduction of this concept of so-called class-based processing [10, 14, 2, 11], several applications to face recognition and related problems have been published [17, 4, 3]. Typically, these methods rely on the establishment of a dense correspondence field, before any recognition or generalization is attempted. Approaches that gave up this constraint showed a certain promise [9], but could not compete, performance-wise, either with the human subjects, or with the more sophisticated correspondence-based methods.

In the present work, the employment of a front end containing Gabor filters at multiple scales and orientations [8] served to reduce the need for detailed pixel-by-pixel correspondence, and allowed the viewspace interpolation method [5] to be utilized to its full potential. We conjecture that a further improvement in the front-end measurement stage, combined with a more advanced approach to interpolation (which is currently done by inverse-distance weighting), will close most of the remaining gap between the system's 3-way discrimination error (8%) and the error exhibited by human subjects (3%).

## References

- [1] P. Alfeld. Cattered d t interpolation in three or more v r i bles. In T. Lyche and L. chum ker, editors, *Mathematical Methods in Computer Aided Geometric Design*, pages 1–33. Academic Press, New York, 1989.
- [2] R. B sri. Recognition by prototypes. A.I. Memo No. 1391, Artificial Intelligence Laboratory, M s-

- s chusetts Institute of Technology, C mbridge, MA, 1992.
- [3] R. B sri. Recognition by prototypes. *International Journal of Computer Vision*, 19(147-168), 1996.
- [4] D. Beymer and T. Poggio. Image representations for visual learning. *Science*, 272:190–1909, 1996.
- [5] . Edelman and . Duvdev ni-B r. imilarity-based viewspace interpolation and the categorization of 3D objects. In *Proc. Similarity and Categorization Workshop*, pages 7–81, Dept. of AI, University of Edinburgh, 1997.
- [6] . Edelman and . Duvdev ni-B r. imilarity, connectionism, and the problem of representation in vision. *Neural Computation*, 9:701–720, 1997.
- [7] W. J. Gordon and J. A. Wixom. Shepard's method of 'Metric Interpolation' to bivariate and multivariate interpolation. *Mathematics of Computation*, 32:23–264, 1978.
- [8] A. J. Howell and H. Buxton. Receptive field functions for face recognition. In *Proc. 2nd Int. Workshop on Parallel Modelling of Neural Operators for Pattern Recognition (PAMONOP)*, pages 83–92, Faro, Portugal, 1991.
- [9] M. L ndo and . Edelman. Receptive field spaces and class-based generalization from single view in face



- [13] T. Poggio and J. Edelman. A network that learns to recognize three-dimensional objects. *Nature*, 343:263–266, 1990.
- [14] T. Poggio and T. Vetter. Recognition and structure from one 2D model view: observations on prototypes, object classes, and symmetries. A.I. Memo No. 1347, Artificial Intelligence Laboratory, Massachusetts Institute of Technology, 1992.
- [15] D. Shepard. A two-dimensional interpolation function for irregularly spaced data. In *Proc. 23rd National Conference ACM*, pages 17–24. ACM, 1968.
- [16] S. Ullman and R. B. Sri. Recognition by linear combinations of models. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 13:992–1000, 1991.
- [17] T. Vetter and T. Poggio. Image synthesis from single exemplar image. In B. Buxton and R. Cipollari, editors, *Proc. ECCV-96*, number 106 in Lecture Notes in Computer Science, pages 62–69, Berlin, 1996. Springer.